


Window Grille/Blank Fitting Instructions

Please read these fitting instructions thoroughly before commencement to help ensure correct usage.

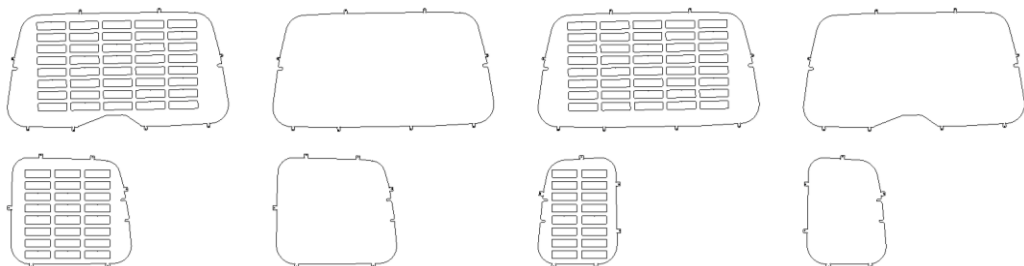

Please note - Image is for illustration purposes only

1

Window grilles/blanks can be handed and can differ in size so please be mindful of this, and check prior to fitment.

2

Offer item up to the window to ensure correct fitment visually, then bend tabs to suit the window aperture using a sufficient surface to work on, and sufficient pliers. By checking to the window aperture first this should ensure that you bend the tabs the correct way. Bending the tabs incorrectly can result in weakness and possible failure of the tabs.

3

If you're happy with the positioning of the grilles/blanks carefully drill 3.2mm holes in readiness for the self-tapping screws supplied to you. Please take the utmost care when drilling not to catch any wiring etc as Hubb Systems Ltd cannot accept responsibility should this occur.

4

Secure your window grille/blank into place using the fixings provided.